

NR&D



"The serial ports support 17 separate modes including all of the Square D and Modicon serial protocols."

SPE4-3D

Serial Port Expander

Description

The SPE4-3D, equipped with five RS-422/485 serial ports, is the most recent version of the SPE4 which has been a best seller for over a decade.

The SPE4-3D is a drop-in replacement for the SPE4-1D and the SPE4-2D.

The SPE4-3D now has several new features previously unavailable:

- The termination and bias of the serial ports is now configurable.
- The backplane interface is now 16-bits wide.
- Module configuration can be written to EEPROM "on-the-fly"
- Firmware is now downloadable to FLASH instead of requiring an EEPROM change.

Applications

Modbus Port Expander

- Connect up to 4 Modbus master devices to a single Modbus slave
- Or use Auto-scan to gather data from Modbus Slaves and write it to the PLC

Modbus DCS to POWERLOGIC

- Connect a Modbus DCS to POWERLOGIC equipment
- Converts Modbus to POWERLOGIC protocol
- Connect up to 128 POWERLOGIC devices to a single SPE4
- Or mix POWERLOGIC and Modbus slave devices on the same RS-485 network

Serial Protocol Converter

- Devices with different protocols can communicate with each other on separate serial ports

PLC Programming Access Point

- Plug a PC into an SPE4-3D serial port and program Modicon and SY/MAX PLCs over the same connection. The NR&D **SC902** Smart Cable will connect an SPE4-3D serial port to a PC COM port.

Register Rack Interface

- Gather data from Powerlogic and Modbus devices
- Present the data over the backplane to the PLC
- Works in local and remote SY/MAX racks
- 16-bit backplane preserves analog data

Radio Master

- Control radio networks
- Mix Modbus devices onto RNIM radio networks



Data Concentrator

- Store data in the 2,048 mailbox registers accessible through any port
- Auto-scan devices on the serial ports with register reads and writes
- Allows slave devices to share data with no PLC intervention

SY/MAX Port Expander

- Add ports to a SY/MAX processor
- Add additional operator interfaces
- Connect to SY/NET through a NIM
- Set ports to act as an RNIM or a PNIM
- Give SY/MAX processor Modbus capability
- Move important data to the PLC through the backplane

**Modbus or SY/MAX
Port Expander**

**Serial Protocol
Conversions**

**Poll, Store, and
Share Data**

**Reach up to 128
POWERLOGIC Devices**



(Front View)


“...program Modicon
and SY/MAX PLCs
over the same
connection.”

The serial ports support 17 separate modes including all of the Square D and Modicon serial protocols. Some modes allow devices with different protocols to exist on the same physical media. Each port can be independently configured, and ports 1-4 support 4-wire RS-422 point-to-point or 2-wire or 4-wire RS-485 multidrop. Each serial port has an auto-scan table of 48 entries.

The SPE4-3D is in the form factor of a SY/MAX rack module. When used in a SY/MAX rack it has a register interface to the PLC but can also be used as a stand-alone solution by including a Niobrara **NRK2** single slot rack.

The configuration of the SPE4-3D is stored in registers available from any port. The configuration can be changed "on-the-fly" without rebooting the module.

The configuration registers are stored in capacitor-backed RAM. For long-term module storage the configuration can be written to EEPROM "on-the-fly" or to FLASH when the module is in download mode. The module comes with a CD containing a manual and SPE4SW32 configuration software for the PC. Firmware upgrades are available free of charge for one year after date of purchase. The SPE4 carries a one-year warranty.

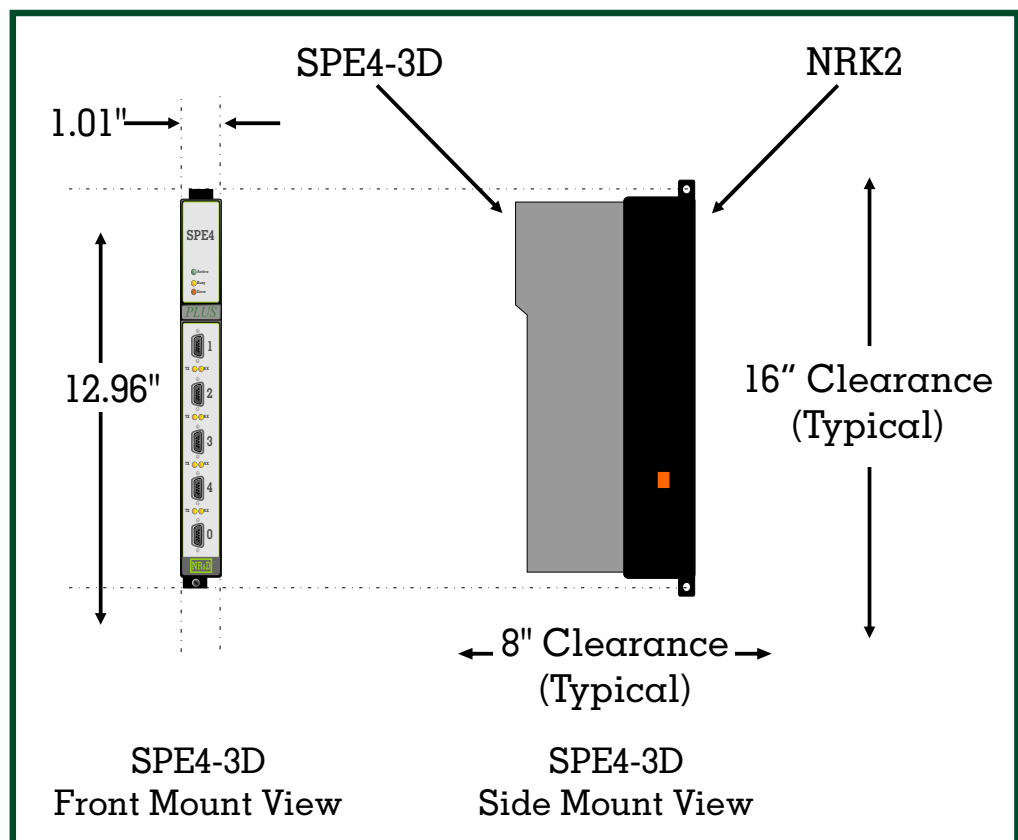

Panel Layout for SPE4-3D Installations using NRK2 Power Supply



Ordering Information

The SPE4 is available as:

- **SPE4-3D** with 5 RS-422 ports
- **SPE4-1S** with 4 RS-232 ports and 1 RS-422 port
- **SPE4-2S** with 4 RS-232 ports and 1 RS-422 port, rack addressable

SPE4 Accessories

- **SC902** RS-232<=>RS-422 Converter cable for configuring the SPE4 and upgrading its firmware.
- **NRK2** Single slot rack with built in power supply for stand alone installations.
- **DC1** RS-422 cable for connecting the SPE4 to a SY/MAX PLC or NIM.

Specifications

Dimensions	Standard SY/MAX register module. 1.5" wide by 13" tall by 6.5" deep. Approximately four pounds net. Rugged welded steel enclosure with baked on finish. All serial connectors and indicators are on the front. The SY/MAX bus card edge connector is on the back.
Power Requirements	From SY/MAX bus or NRK2: 5 VDC, 1.5 A
Serial Ports 1-4	SY/MAX compatible pin-out. Four RS-422/RS-485 serial ports. 50, 75, 110, 134.5, 150, 300, 600, 1200, 1800, 2400, 3600, 4800, 7200, 9600, 14,400 or 19,200 baud; 7 or 8 data bits; odd, even or no parity; 1 or 2 stop bits. Selectable checksum (BCC or CRC) supported in some modes. SY/MAX compatible DB9 female connectors with slide-lock posts. When used in RS-485 mode, ports are 2- and 4-wire compatible. Handshaking. Auto-scan and Auto-transfer enabled. Configurable Bias and Termination.
Serial Port 0	RS-422 SY/MAX compatible. Same pinout as SY/MAX processor. Slide-lock posts. 134.5 to 14,400 baud. Even, odd, or no parity. 1 or 2 stop bits. 7 or 8 data bits. Provides +5VDC.
Serial Port Modes	Any serial port can independently operate in any of the following modes: SY/MAX, Net-to-Net, Peripheral, PLogic, IDEC, Modbus Host (RTU - Master and Slave), Modbus Gate (RTU - master and slave), Modbus ASCII, Gateway, Transparent, Share, Chevron, or Dual Slave. Ports 1-4 can also be configured for PNIM, RNIM Master, RNIM Slave, or Multidrop.
Mailbox Registers	2048 processor equivalent registers addressed 1 through 2048. Any number of these may be rack addressed as needed for user applications. Any rack addressed register can be a PLC input or a PLC output as required by the application.
Module Configuration	Module configuration is stored in registers in capacitor-backed RAM and can be changed "on the fly". For long-term storage, configuration can be stored to EEPROM "on the fly" or to FLASH when module is in download mode.
Indicators	Transmit and Receive LEDs for ports 1-4. Active, Error, and Busy LEDs for the Module. Eleven total indicators.
Operating Conditions	0 to 50 degrees C operating temperature; -40 to 80 degrees C storage. Humidity up to 90% noncondensing. Pressure altitude -200 to +10,000 feet MSL.
Buttons & Switches	Clear button erases RAM and restores module configuration from EEPROM, FLASH, or Factory Defaults. Download switch allows for module firmware download or configuration storage to FLASH.

"...surprisingly easy to configure."

Niobrara Research
& Development
Corporation
www.niobrara.com
P.O. Box 3418
Joplin, MO
(800)235-6723
(417) 624-8918 USA